

QF(26)HR - Series Miniature Circuit Breakers



1 Pole
Dual (DIN & mini rail)
mount

2 Pole
Dual (DIN & mini rail)
mount

3 Pole
Dual (DIN & mini rail)
mount

3 Pole + N
Dual (DIN & mini rail)
mount

Features

- AC circuit breaker
- Hydraulic-magnetic technology
- 100% rated current capability, independent of ambient temperature
- One, two, three pole, 1+N and 3+N (VDE)
- VC 8036 (SANS 556-1) and CE compliant
- VDE and EAC approved
- Ratings 60 A to 100 A (UL 489)
- Ratings 60 A to 125 A (IEC 60947-2)
- Available in various currents and time delays
- Precision tripping characteristics
- Can be switched immediately after tripping
- Dual (DIN & mini rail) mount, 57 mm front escutcheon (Black)
- Suitable to use for electrical isolation

Applications

- AC branch circuit protection (DIN / EN 60947-2)
- Switch disconnecter (DIN / EN 60947-3, UL 508)
- Telecom / datacom equipment
- Lighting control
- UPS equipment
- Mobile power generation equipment
- Railway signalling equipment
- Residential equipment
- Industrial equipment

Optional Accessories

- Handle lock - QFAP001
- Surface mounting clips - 2096001
- Escutcheon blank - SFEB000
- Safety blank - SAEB000

VC 8036 (SANS 556-1)
(SANS IEC 60947-2)



(DIN / EN 60947-2/3)



(UL 508)
(Switch only)



(UL 489)



(GB 14048.2 / 3)




(IEC 60947-2/3)



Hydraulic-Magnetic Circuit Breakers 100% rated, unaffected by ambient temperature

QF(26)HR - Series Miniature Circuit Breakers

Technical Data

Product Type	Circuit Breaker				
Approvals	DIN / EN 60947-2, EAC, CE, UKCA, VC 8036 (SANS 556-1)				
Number of Poles	1	2 (1+N)	2	3	4 (3+N)
Operating Voltages	240 Vac		415 Vac		
Minimum Current Rating	70 A				
Maximum Current Rating	125 A				
Ultimate S/C Breaking Capacity (Icu)	6 kA (IEC), 5 kA (VC 8036)				

Product Type	Circuit Breaker		
Approvals	GB/T14048.2		
Number of Poles	1	1 + N	2, 3, 3 + N, 4
Operating Voltages	240 Vac		415 Vac
Minimum Current Rating	60 A		
Maximum Current Rating	125 A		
Ultimate S/C Breaking Capacity (Icu)	6 kA		

Product Type	Circuit Breaker	
Approvals	UL 489	
Number of Poles	1	2
Operating Voltages	120 Vac	120 / 240 Vac
Minimum Current Rating	60 A	
Maximum Current Rating	100 A	
Ampere Interrupting Capacity (AIC)	10 kA	

Product Type	Switch Disconnecter				
Approvals	VC 8036 (SANS 556-1), DIN / EN 60947-3, UL 508, GB/T14048.3				
Number of Poles	1	2	3	4	4 (3+N)
Operating Voltages	240 Vac	415 Vac			
Current Rating	125 A				
Short-time Withstand	6 kA / 50 ms				

QF(26)HR - Series Miniature Circuit Breakers

Technical Data

Product Type	QF(26)HR
Ambient Operating Temperature	-40 °C to +85 °C
Mounting Options	Dual (DIN & mini rail) mount, surface mount
Time Delay Curves	1, 2
Endurance	10000 operations - 1500 with current, 8500 without current (IEC 60947-2 Clause 7.2.4.2)*
Dielectric Strength	1000 - 2000 Vac for one minute (IEC 60947-2 Clause 8.3.3.3)*
Rated Impulse Withstand Voltage	6 kV (IEC 60947-2 Clause 8.3.3.2)
Weight	200 g per pole (unpacked)
Altitude	Certification tests done at altitude ≈ 2000 metres. Will operate at higher altitudes.
Shock	50 G to MIL-STD-202G, test method 213B, test condition 1
Vibration	10 G to MIL-STD-202G test method 204D, test condition A
Flammability	I3 - Ignition does not persist at 850 °C after glow wire is withdrawn with an oxygen index of ≥ 28
Toxicity	F1 - Smoke index of ≤ 20 which determines the fume class
Pollution Degree	PD2 - Normally only non-conductive pollution occurs. Temporary conductivity caused by condensation is to be expected.

* Refer to standard for details.

Circuit Breaker	Wire Size (IEC)	Wire Gauge (UL)	Torque (IEC)	Torque (UL)	Comments
Main Terminals	1 mm ² - 50 mm ²	6 – 1 AWG	4 Nm	35.4 in-lb	Pozidriv #2 Combi head

QF(26)HR - Series Miniature Circuit Breakers

Long Code

Example Code: QF---3(26)-DM-2-125A-HR---

Group	1	2	3	4	5	6	7	8	9	10	11	12	13
Requirement	QF Frame	Switch / neutral	N/A	No of poles	Module width	Dual mount	Medium delay curve	Current rating	Mechanism Type	Shunt trip	Future use	Future use	Customer specific
Long Code	QF	-	-	3	(26)	DM	2	125A	HR	-	-	-	-


Ordering Information

Group 1: Frame Type	Code	Description	Comments	
	QF	Miniature circuit breaker		
Group 2: Switch/Neutral	Code	Description	Comments	
	-	Not applicable		
	N	Neutral	Green handle	
Group 3: Auxiliary	Code	Description	Comments	
	-	Not applicable		
Group 4: No. of Poles	Code	Description	Comments	
	1	Single pole		
	2	Double pole	2 pole or 1+N	
	3	Triple pole		
	4	Four pole	3+N only	
Group 5: Module Width	Code	Description	Comments	
	(26)	26 mm module width		
Group 6: Mounting	Code	Description	Comments	
	DM	Dual (DIN & mini rail) mount	Dual mount supplied in black only - 57 mm front escutcheon	
Group 7: Time Delays	Code	Description	Instantaneous Trip Point (x In)	Comments
	1	Long time delay, high instantaneous trip	10 – 20	Orange handle
	2	Medium time delay	5 – 10	White handle
Group 8: Current Ratings	Code / Description		Comments	
	60, 70, 80, 90, 100, 125 A			
Group 9: Type Mechanism	Code	Description	Comments	
	HR	SF Mechanism, High rating		
Group 10: Shunt Trip	Code	Description	Comments	
	-	Not applicable		
Group 11	Code	Description	Comments	
	-	Not applicable	For future use	
Group 12 Special Termination	Code	Description	Comments	
	-	Not applicable	For future use	
Group 13 Customer Specific	Code	Description	Comments	
	-	Not applicable	For future use	

For options not listed, please contact CBI

QF(26)HR - Series Miniature Circuit Breakers


Time Delay Curve

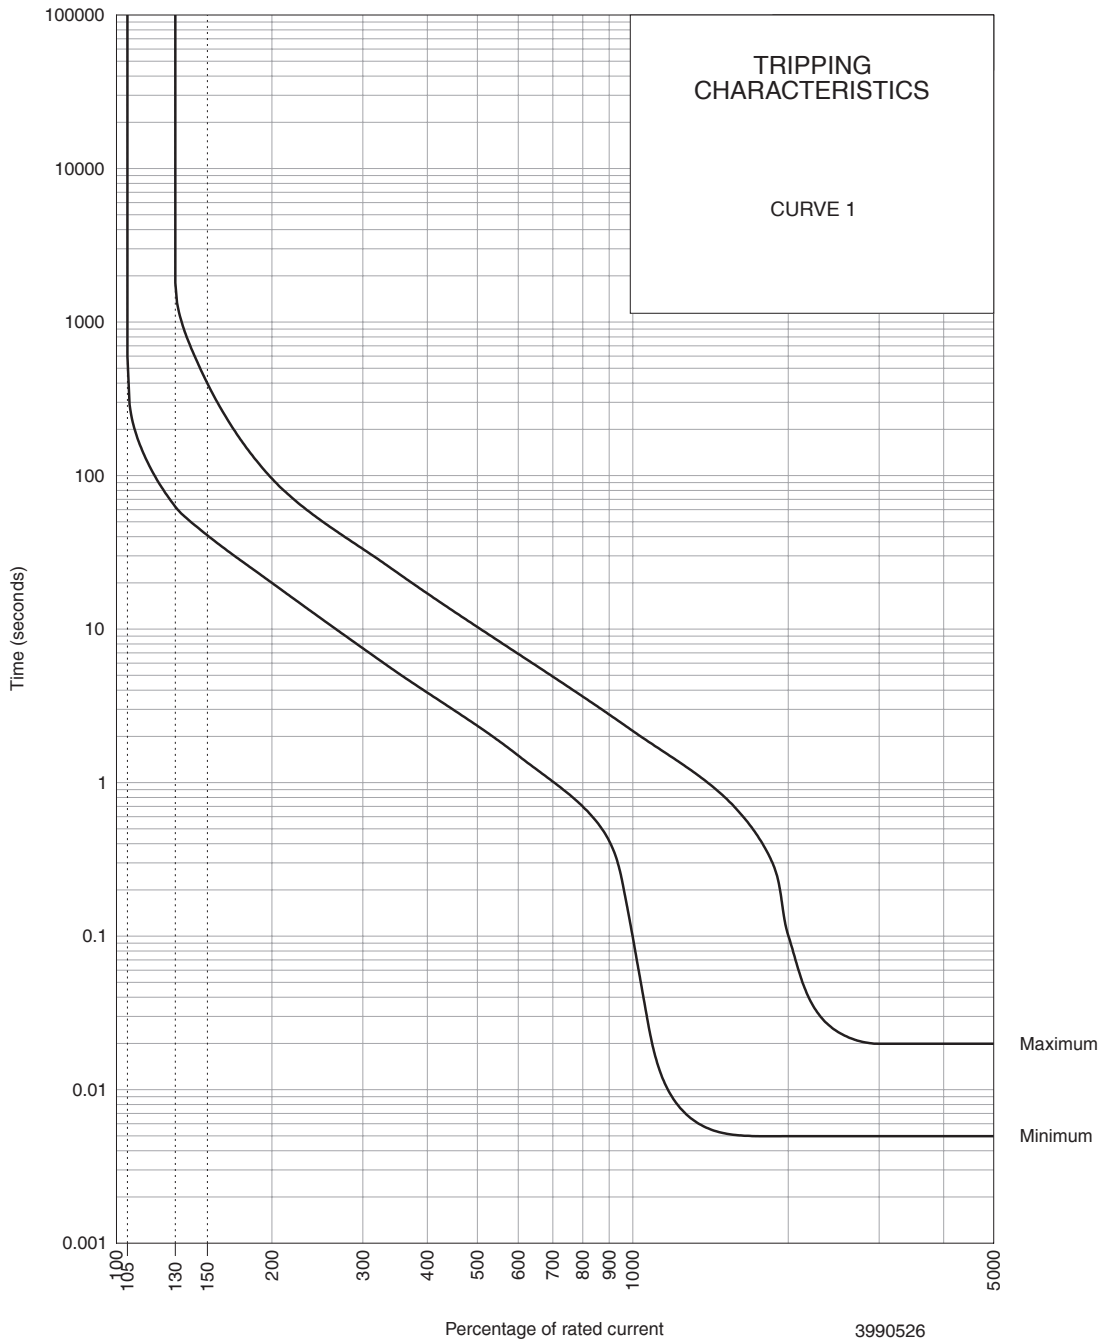

PERCENTAGE OF RATED CURRENT	105%	130%	145%	150%	200%	300%	400%	500%	600%	700%	800%	900%	1000%	2000%
MINIMUM TRIP TIME IN SECONDS	NO TRIP	63	45	41	20	7.5	3.8	2.3	1.5	1.01	0.7	0.42	0.1	0.005
MAXIMUM TRIP TIME IN SECONDS	NO TRIP	1800	503	400	96	34	17	10.3	6.8	4.9	3.6	2.8	2.2	0.1

QF(26)HR - Series Miniature Circuit Breakers

Time Delay Curve

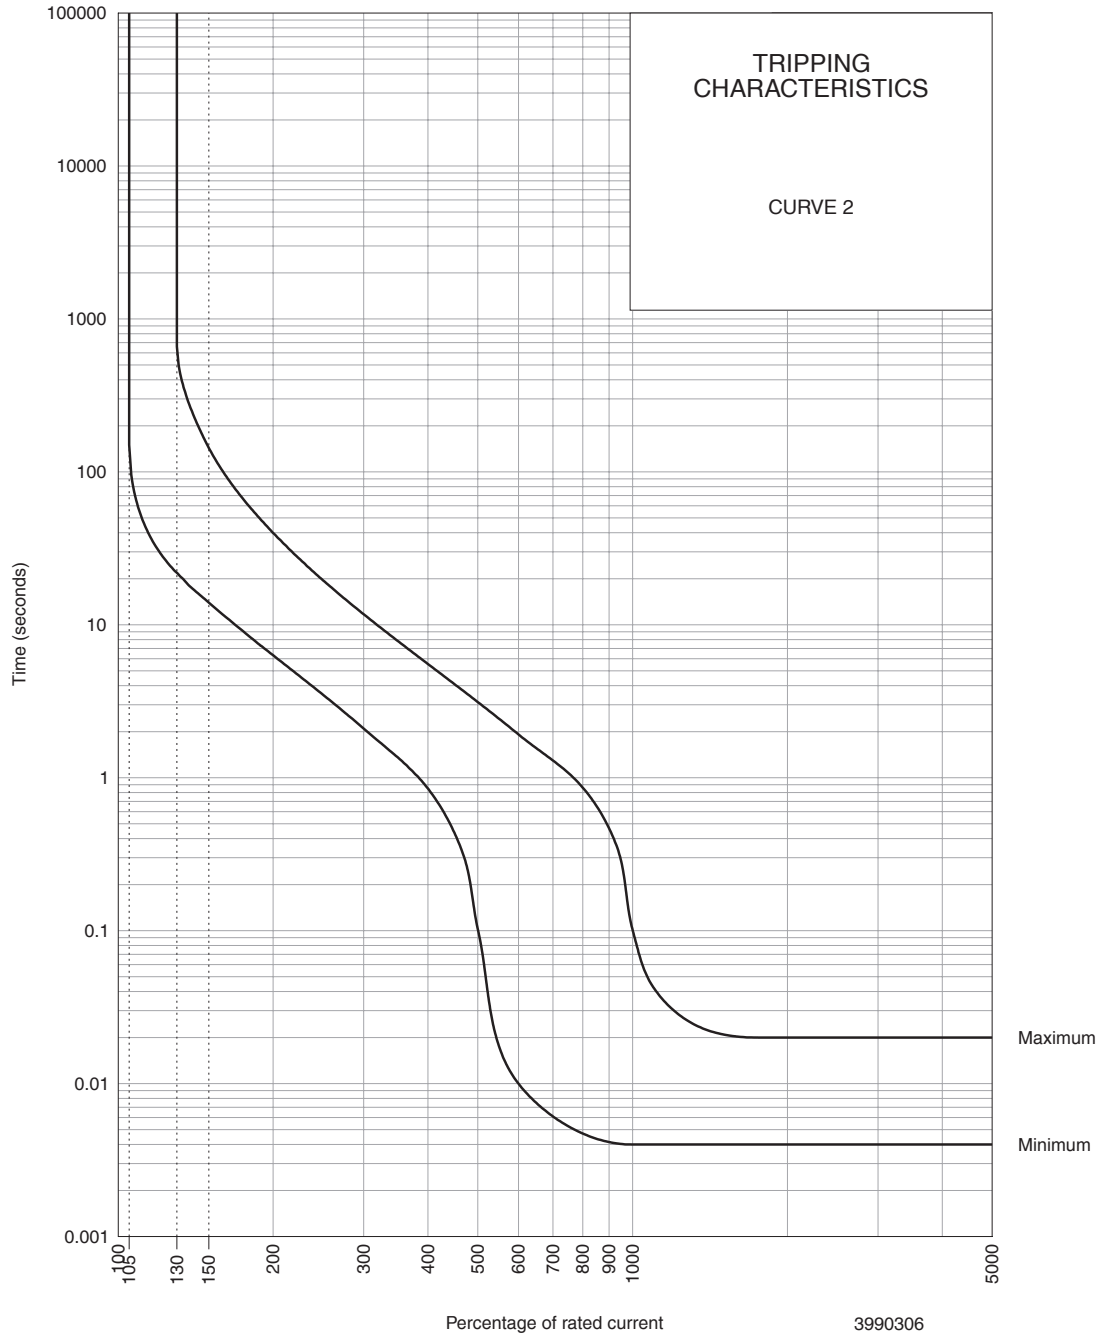


PERCENTAGE OF RATED CURRENT	105%	130%	145%	150%	200%	300%	400%	500%	600%	700%	800%	900%	1000%	2000%
MINIMUM TRIP TIME IN SECONDS	NO TRIP	22	15.4	14	6.3	2.1	0.85	0.1	0.001	0.006	0.005	0.041	0.004	0.004
MAXIMUM TRIP TIME IN SECONDS	NO TRIP	660	180	144	40	12	5.5	3	1.92	1.3	0.86	0.47	0.1	0.02

* The published time delay curves are generated at 30°C ambient temperature with the circuit breaker mounted in the up-right position. The “must hold”, “must trip” and “instantaneous trip” current values are not affected by temperature, although delay time for the other operating current values may have to be adjusted using the temperature compensation curve which is available on request.

QF(26)HR - Series Miniature Circuit Breakers

Outline Dimensions: Dual (DIN & mini rail) mount

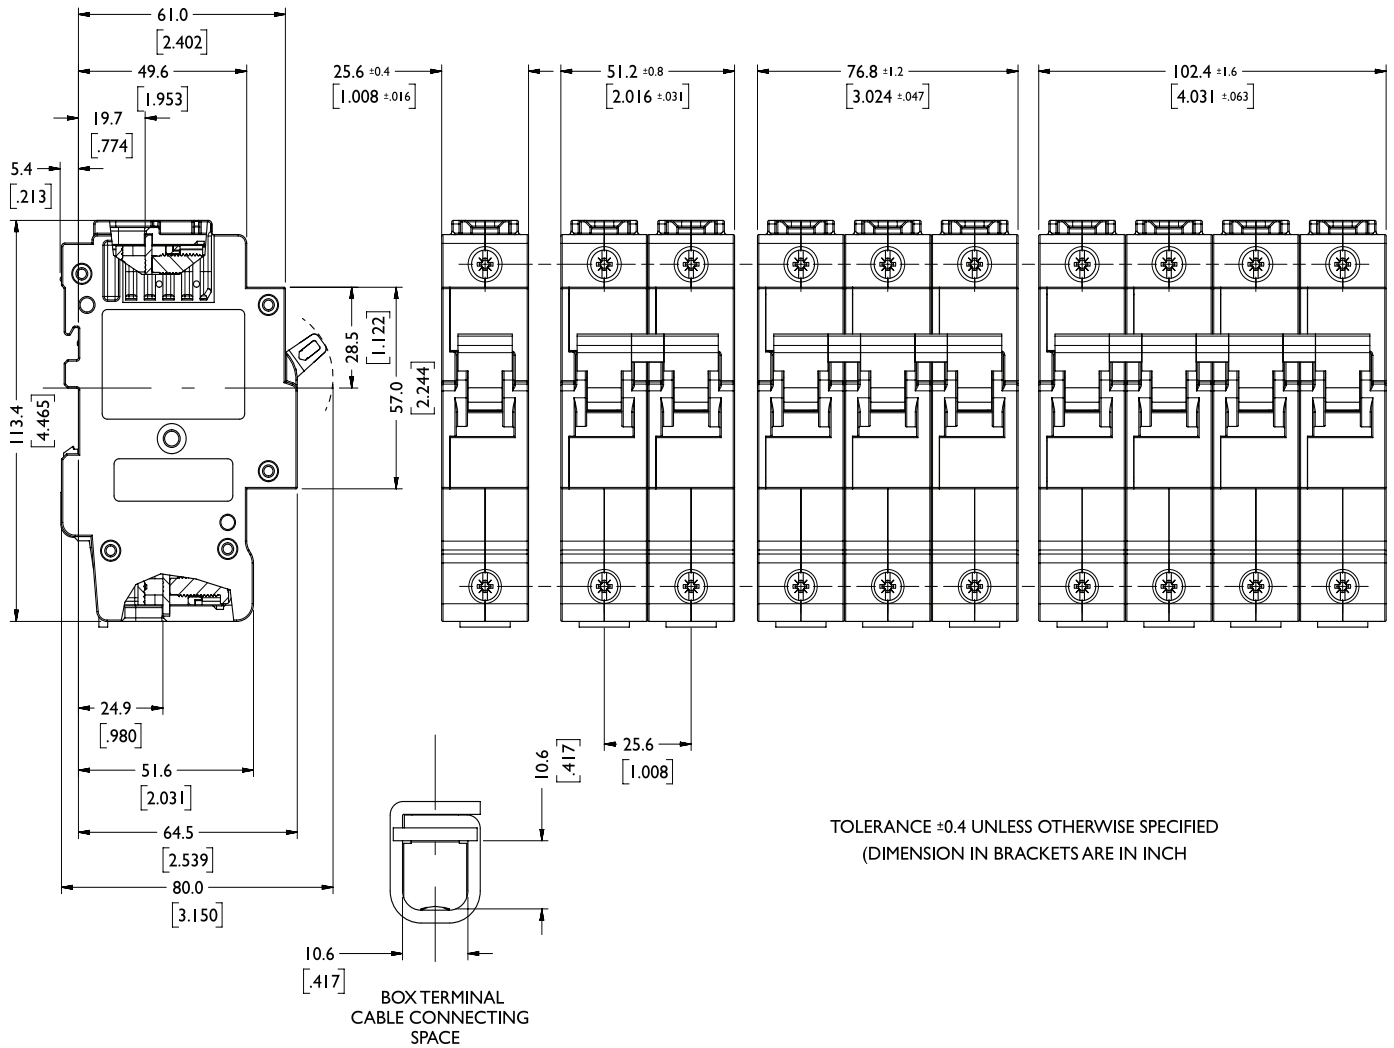

TOLERANCE ±0.4 UNLESS OTHERWISE SPECIFIED
(DIMENSION IN BRACKETS ARE IN INCH)

Please review our Customer Terms and Conditions on www.cbi-lowvoltage.co.za

All rights reserved. Unless otherwise indicated, all materials on these pages are copyrighted by CBI (Pty) Ltd. No part of these pages, either text or image may be used for any purpose other than personal use. Therefore, reproduction, modification, storage in a retrieval system or retransmission, in any form or by any means, electronic, mechanical or otherwise, for reasons other than personal use, is strictly prohibited without prior written permission. CBI (Pty) Ltd reserves the right to alter any details of this document without notice and while every effort is made to ensure the accuracy of the content, no warranty is given as to the accuracy of this document and no responsibility will be accepted for error or misinterpretation and any resulting loss.

SCANDINAVIA

Emcomp International AB
Tomtagatan 17
702 32, Örebro, Sweden
Tel: +46 (0)581 62 15 50
Fax: +46 (0)581 62 15 60
Email: info@emcomp.se
Website: www.emcomp.se

EUROPE

Emcomp International AB
Gewerbepark 23
85250 Altomünster Germany
Tel: +49 8254 994 334 10
Fax: +49 8254 994 334 19
Email: info@emcomp.se
Website: www.emcomp.de