



This drawing remains our property and is not to be copied without our permission, nor to be communicated to any competitor or other unauthorized person.

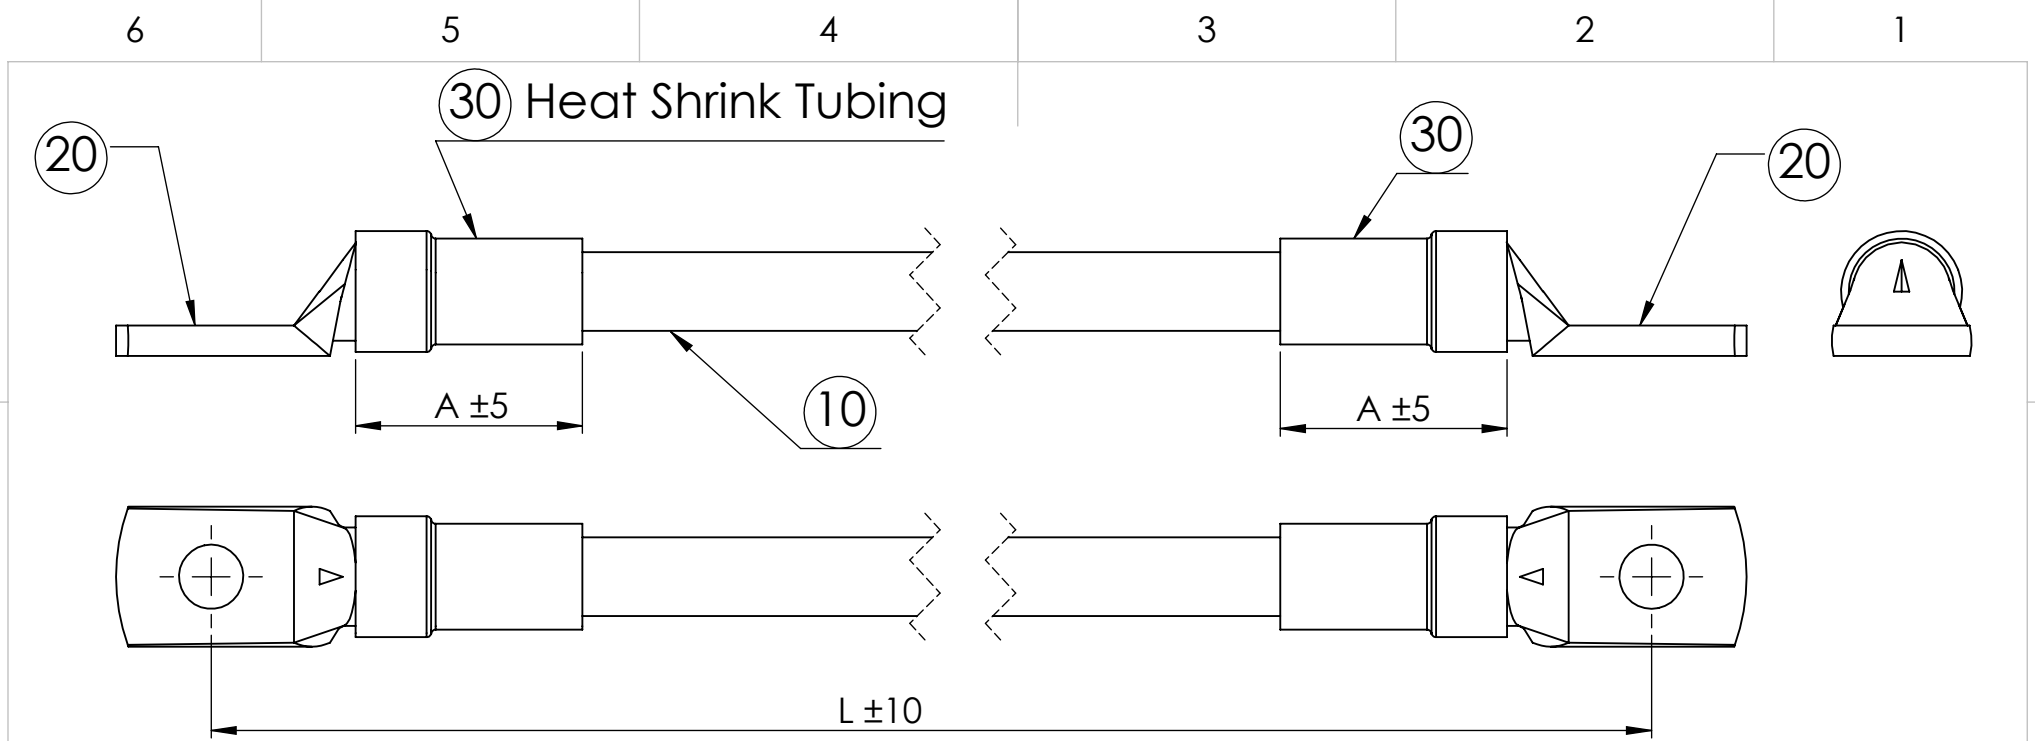

ARTICLE NO	10 Cable	Color	(L) length (mm)	20 (cable lug)	30 (Heat shrink tubing)	(A) length mm
EPC 212705-1	AMOssoft 1x70 (amokabel)	Black	1500	KRF 70-8 tin	B11-19 (Black)	50
EPC 212705-2	AMOssoft 1x70 (amokabel)	Blue	1500	KRF 70-8 tin	B11-19 (Blue)	50
EPC 212705-3	AMOssoft 1x70 (amokabel)	Black	2000	KRF 70-8 tin	B11-19 (Black)	50
EPC 212705-4	AMOssoft 1x70 (amokabel)	Blue	2000	KRF 70-8 tin	B11-19 (Blue)	50
EPC 212705-5	AMOssoft 1x70 (amokabel)	Black	2500	KRF 70-8 tin	B11-19 (Black)	50
EPC 212705-6	AMOssoft 1x70 (amokabel)	Blue	2500	KRF 70-8 tin	B11-19 (Blue)	50
EPC 212705-7	AMOssoft 1x70 (amokabel)	Black	3000	KRF 70-8 tin	B11-19 (Black)	50
EPC 212705-8	AMOssoft 1x70 (amokabel)	Blue	3000	KRF 70-8 tin	B11-19 (Blue)	50

*The product shall be tested according to IEC 61238-1-2 with a pull force minimum 4 200 N

A

Drawn by Marten K	Date 21-05-25	Approved by	Date	Material	Weight kg	Surface finish	Projection		
				Description EPC (Emcomp Power Cable)	Tolerance (Unless otherwise stated)	Size A4	Scale 1:1	Sheet 1 of (1)	Revision
				Drawing number EPC212705			Revision A		